



**Pump specifications:**

Type .....	BA600G D743
Max. flow .....	6500 m <sup>3</sup> /hour (28600 US GPM)
Max. pressure .....	22 mwc (72 ft.)
Discharge x suction .....	DN600 x DN700
Solids handling .....	135 mm (5,3")
Impeller type .....	Axial flow impeller
Priming system .....	BBA MP100
Engine .....	Volvo Penta TAD1182VE
Emission standard .....	Stage V
Canopy .....	EL23-58
Sound level .....	75 dB(A) at 10 m
Dry weight .....	11.000 kg (24.200 lbs)

**FEATURES**

**BA auto prime pump**

The BA range of pumps has been designed with a clear focus on reliability, efficiency and durability. Featuring a 100% mechanical priming system, the BA series pumps quickly prime and re-prime, even from dry conditions. The heavy build style of both pump and canopy make the BA range perfect for use in the strenuous contractor market.

**World-class performance**

The BA range is built to be deployed on the most demanding dewatering and sewage bypassing applications. Using high efficiency pumps and state-of-the-art diesel engines, the pumps offer maximum performance at minimal cost, fully in-sync with the company philosophy of "Lowest cost of ownership".

**Sustainability**

- High efficiency pumps minimising fuel consumption
- Corrosion free hot dip galvanized canopy
- Corrosion free composite door panels and powder coated plating
- 100% Oil-spill free priming system
- Fully bunded unit eliminating fuel/oil spills at all times

**Complete package designed & built by BBA Pumps**

- Complete in-house design & production
- Over 60 years of experience in the market
- Complete testing facility in-house
- Contemporary & functional design
- Durable & eco-friendly materials
- Custom builds available





**After sales service & product support**

- Single supplier for parts, spares & accessories
- Dedicated customer help-desk (24h service)
- Dedicated service department in-house
- Global parts distribution network
- Optional global on-site servicing available
- Extensive training options available (technical & commercial), on-site or in-house



## PERFORMANCE CURVES (620 RPM)

Continuous duty according ISO 9906

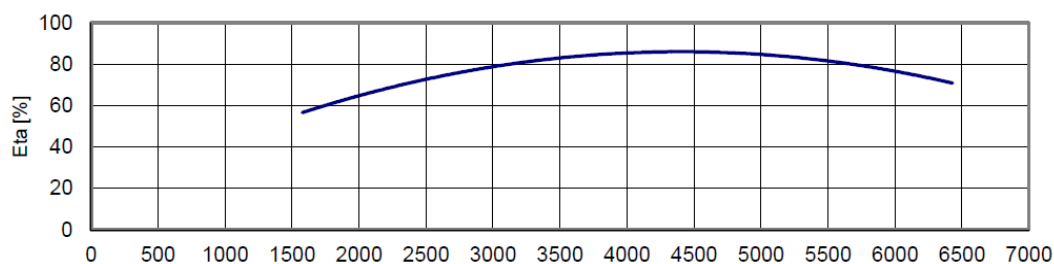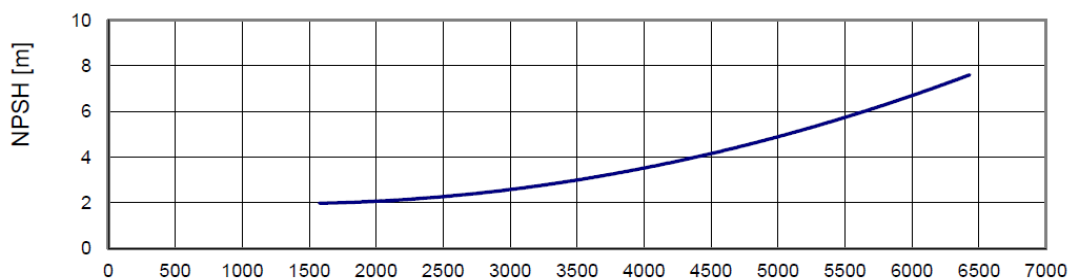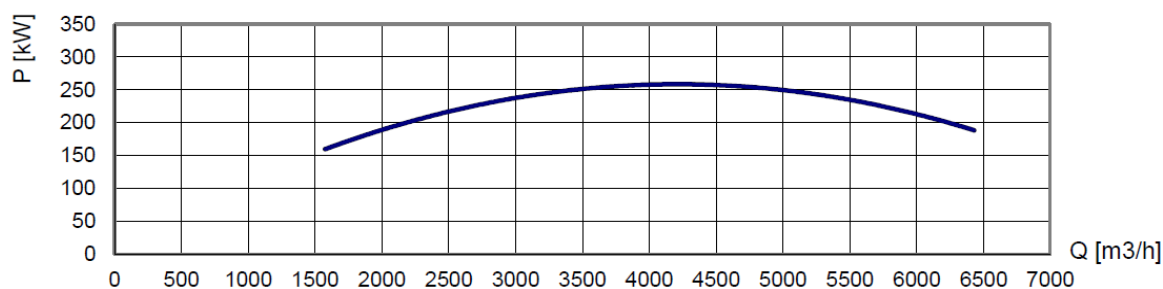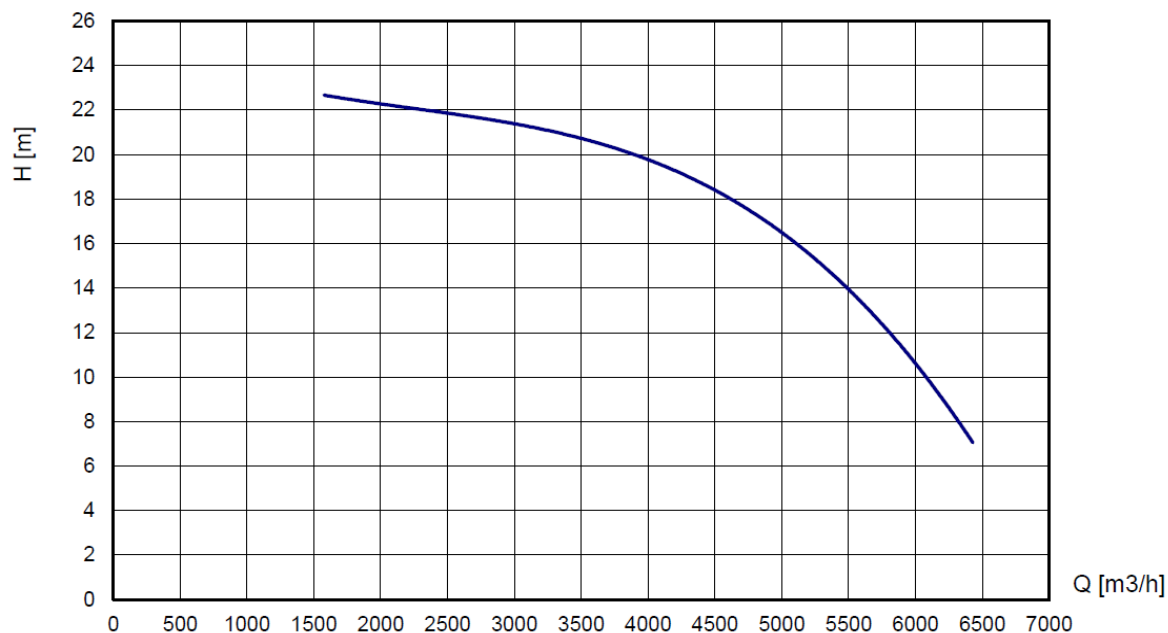

## STANDARD TECHNICAL SPECIFICATIONS

### BBA auto prime pump

Pump type.....	BA600G D743
Max. flow.....	6500 m <sup>3</sup> /hour (28600 US GPM)
Max. head.....	22 mwc (72 feet)
Discharge flange.....	DN600 (PN6) K705
Suction flange.....	DN700 (PN6) K810
Impeller type .....	Axial flow impeller
Solids handling .....	135 mm (5.3 inch)
Best efficiency point.....	88%
Pump casing.....	Cast iron GG20
Impeller .....	Ductile iron GGG40
Pump shaft.....	42CrV6
Shaft seal.....	Mechanical seal



### BBA priming system

Pump type.....	BBA MP100 Diaphragm pump
Air handling capacity .....	100 m <sup>3</sup> /h (59 CFM)
Max. vacuum .....	8.5 m (29 inHg)
Drive .....	E-motor 24V
Float box .....	St 37 hot dip galv.
Float.....	Stainless steel 304
Start/stop .....	Fully automatic



### Engine

Engine brand .....	Volvo Penta
Engine type.....	TAD1182VE
Flywheel power.....	262 kW (356 Hp)
Engine speed.....	1550 RPM
Fuel consumption .....	200 g/kWh
Displacement.....	10.84 l (661 in <sup>3</sup> )
Number of cylinders.....	6
After treatment.....	SCR, DPF + DOC
Emission level.....	Stage V

### BBA control panel LC45

- Auto start/stop system
  - Two float switches included (10m cable)
  - Key switch
  - Rpm. control with push buttons
  - Warning lights
  - 4.3" LCD display
- The LCD monitor displays additional engine data, e.g. actual engine speed, working hours, battery voltage, fuel consumption and failures in clear text (Multilanguage support)



### BBA non-return valve DN600

Flange size entrance .....	DN600 PN6
Flange size delivery .....	DN700 PN6
Casing.....	St 37 hot dip galvanised
Max. pressure.....	4 bar – 58 PSI


(More technical details see separate non-return valve data sheet)



### CANOPY EL23-58

#### BBA sound attenuating canopy

Canopy type.....	EL23-58
Dimensions L x W x H .....	5830 x 2306 x 2300 mm
Dimensions L x W x H .....	229 x 90.8 x 90.5 inch
Basic frame .....	Hot dip galvanised
Doors .....	8 Easy-access doors (lockable)
Door panels .....	ABS/ASA
Fuel tank .....	PE net 300 ltr. (80 US Gallon)
Fuel tank autonomy .....	4 hours (at 1550 rpm BEP)
Fuel tank cap .....	60 mm (2.5 inch)
AdBlue® tank.....	PE net 300 ltr.(80 US Gallon)
Forklift pockets.....	Fitted with 2 forklift pockets
Lifting point .....	Fitted with 4 lifting points
Oil drain pump .....	Drain pump for motor oil installed (hand pump)
Connections.....	Flange connections
Emergency stop.....	Applicable
Additional .....	Fitted with oil-water separator
Documentation .....	User manual & BBA warranty book

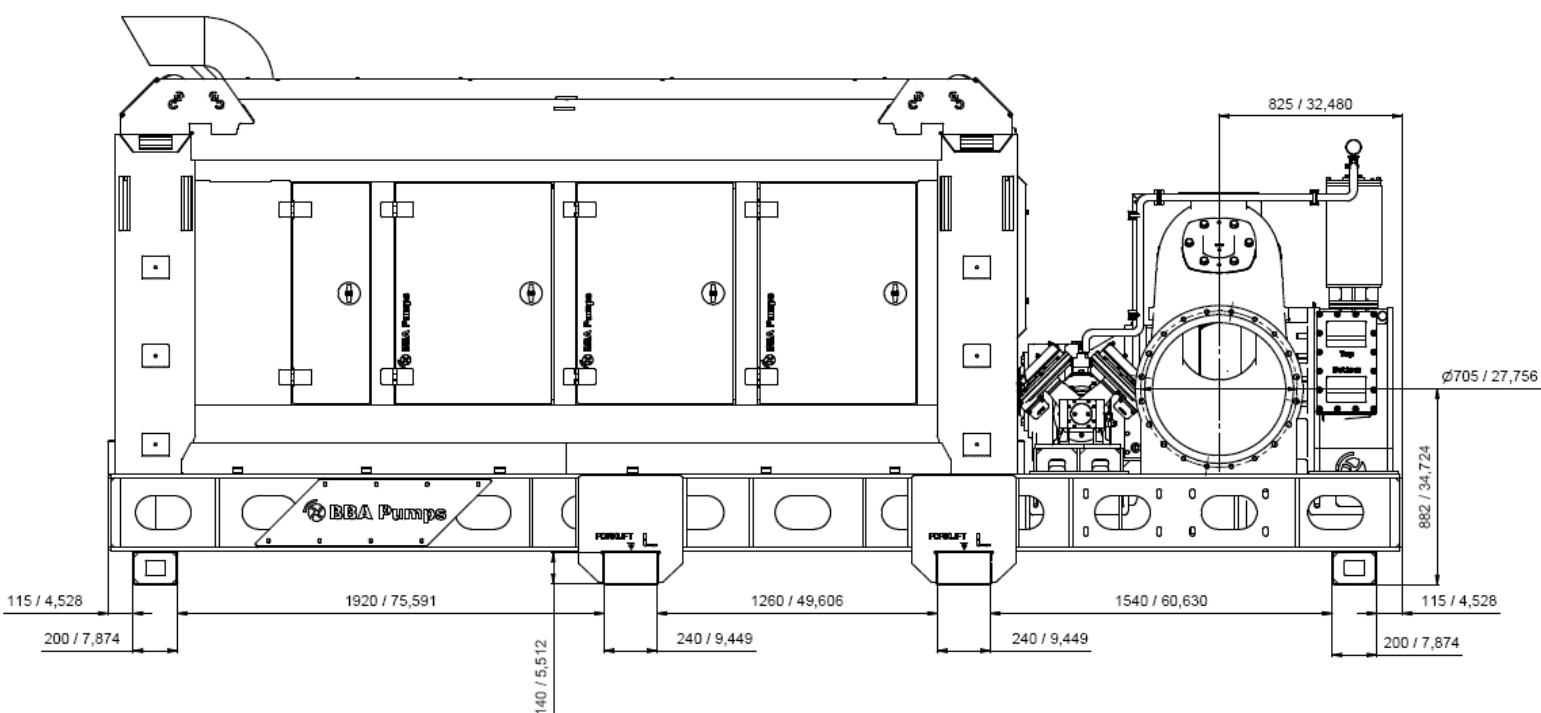

Actual dimensions (in mm & inches) may vary depending on selected connections.






**Factory Acceptance Test**  
Extensive testing facility in-house. FAT must be conducted formally and be witnessed by the owner and/or project manager.




**LED lights**  
Fully integrated in the canopy for easy operation throughout the evening and night.



**Safety**  
Extremely durable and lockable T-locks offering perfect grip.



**Fully bundled unit**  
Fully bundled unit eliminating fuel/oil and AdBlue® spills at all times.



**Cardan shaft**  
Cardan shaft between pump and diesel engine for smooth operation, assembly angle 2.5° - 3°



**Ratio transmission gearbox**  
Hydraulically actuated clutches and helical gearing for a smooth operating speed reduction between engine and pump.



**Double vacuum pump**  
Diaphragm pump, air-cooled, water-resistant and oil-spillage free. Air capacity of 100 m<sup>3</sup> per hour.



**User manual BA series**  
Extensive user manual with important information concerning the pump unit, pump installation and safety warnings. Available in several languages.